

FIG. 1

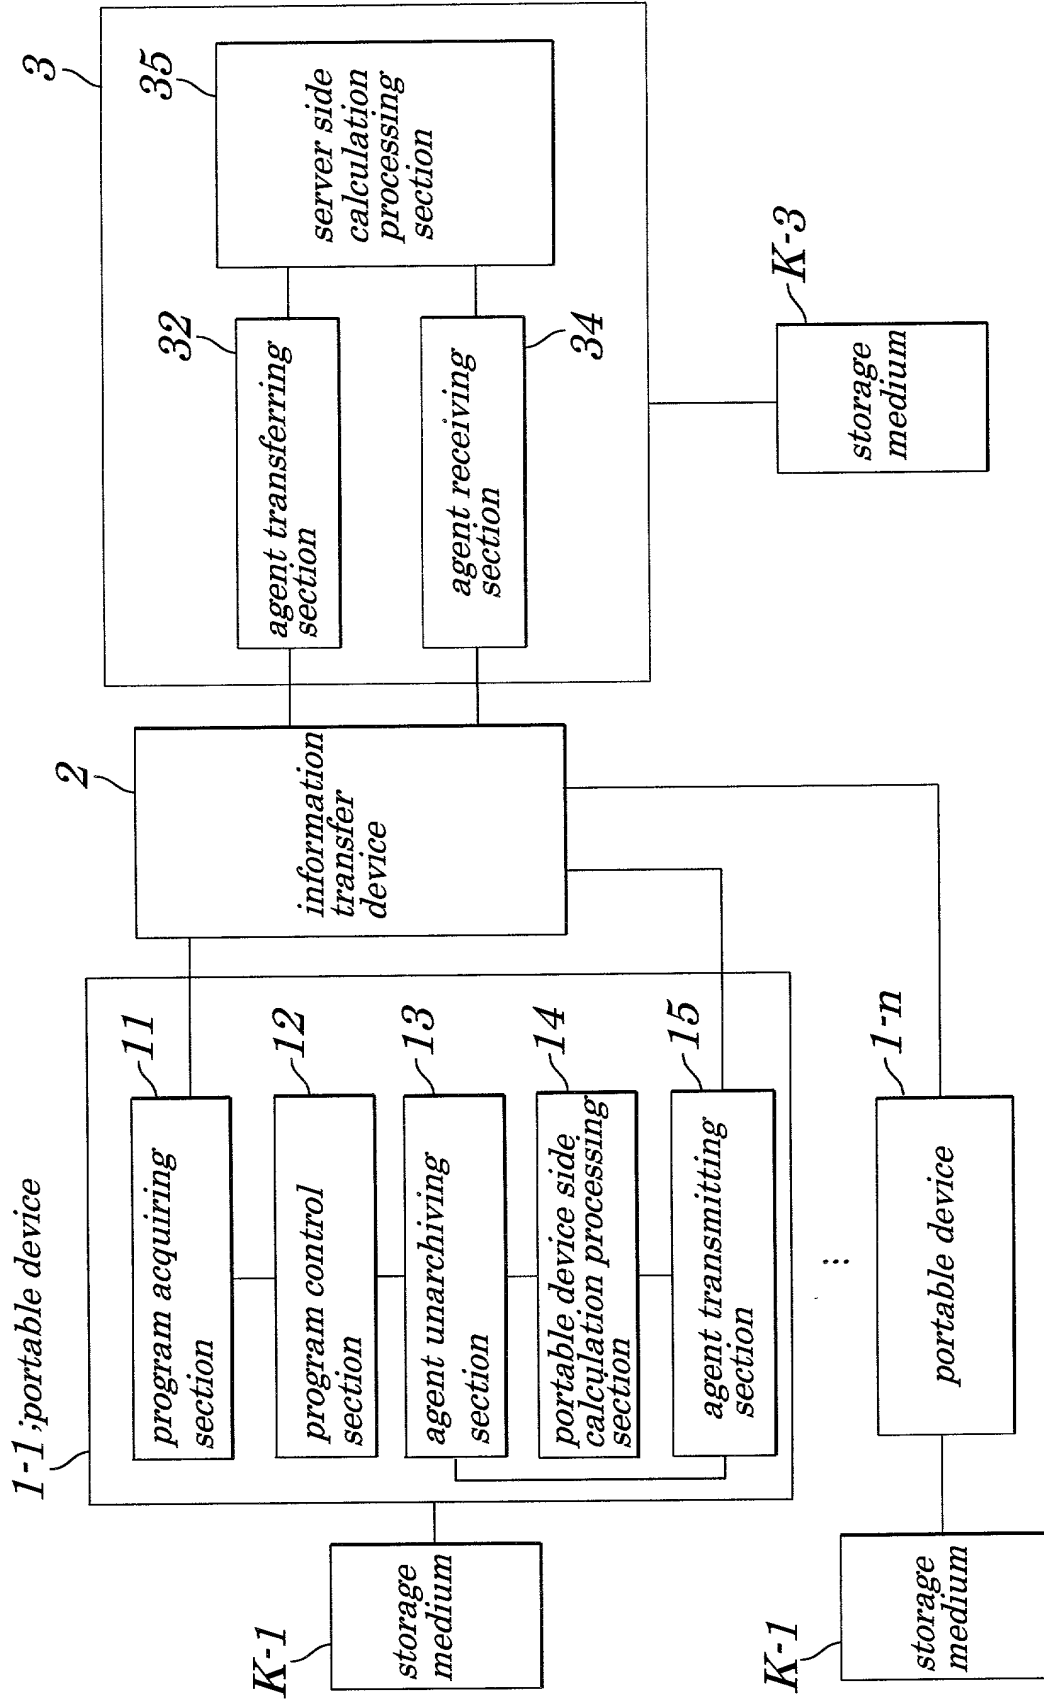


FIG.2

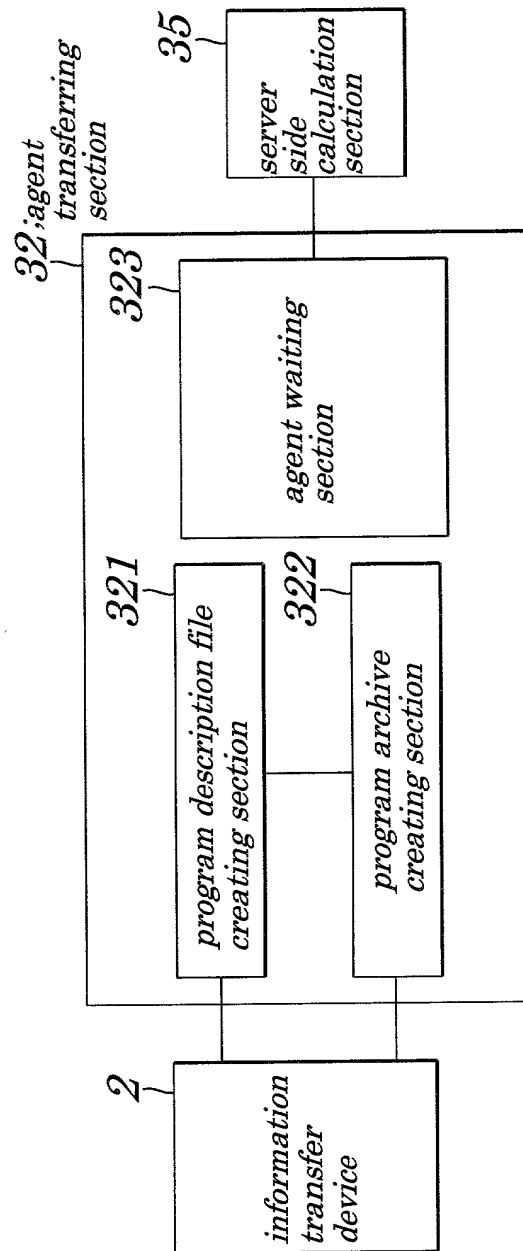


FIG. 3

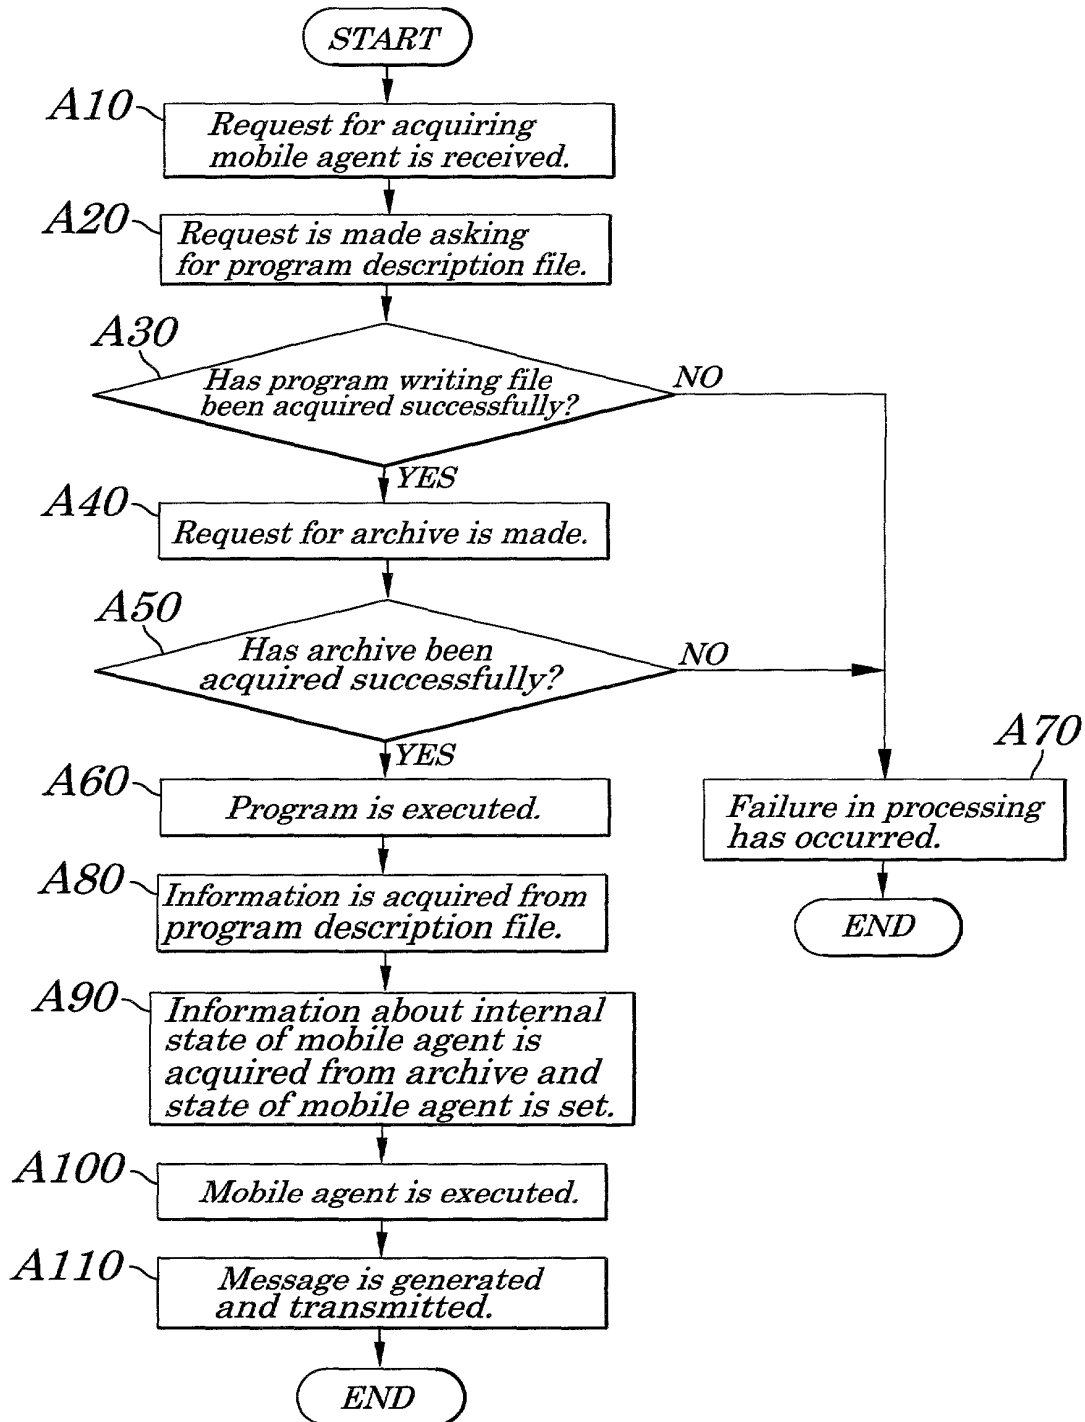


FIG.4

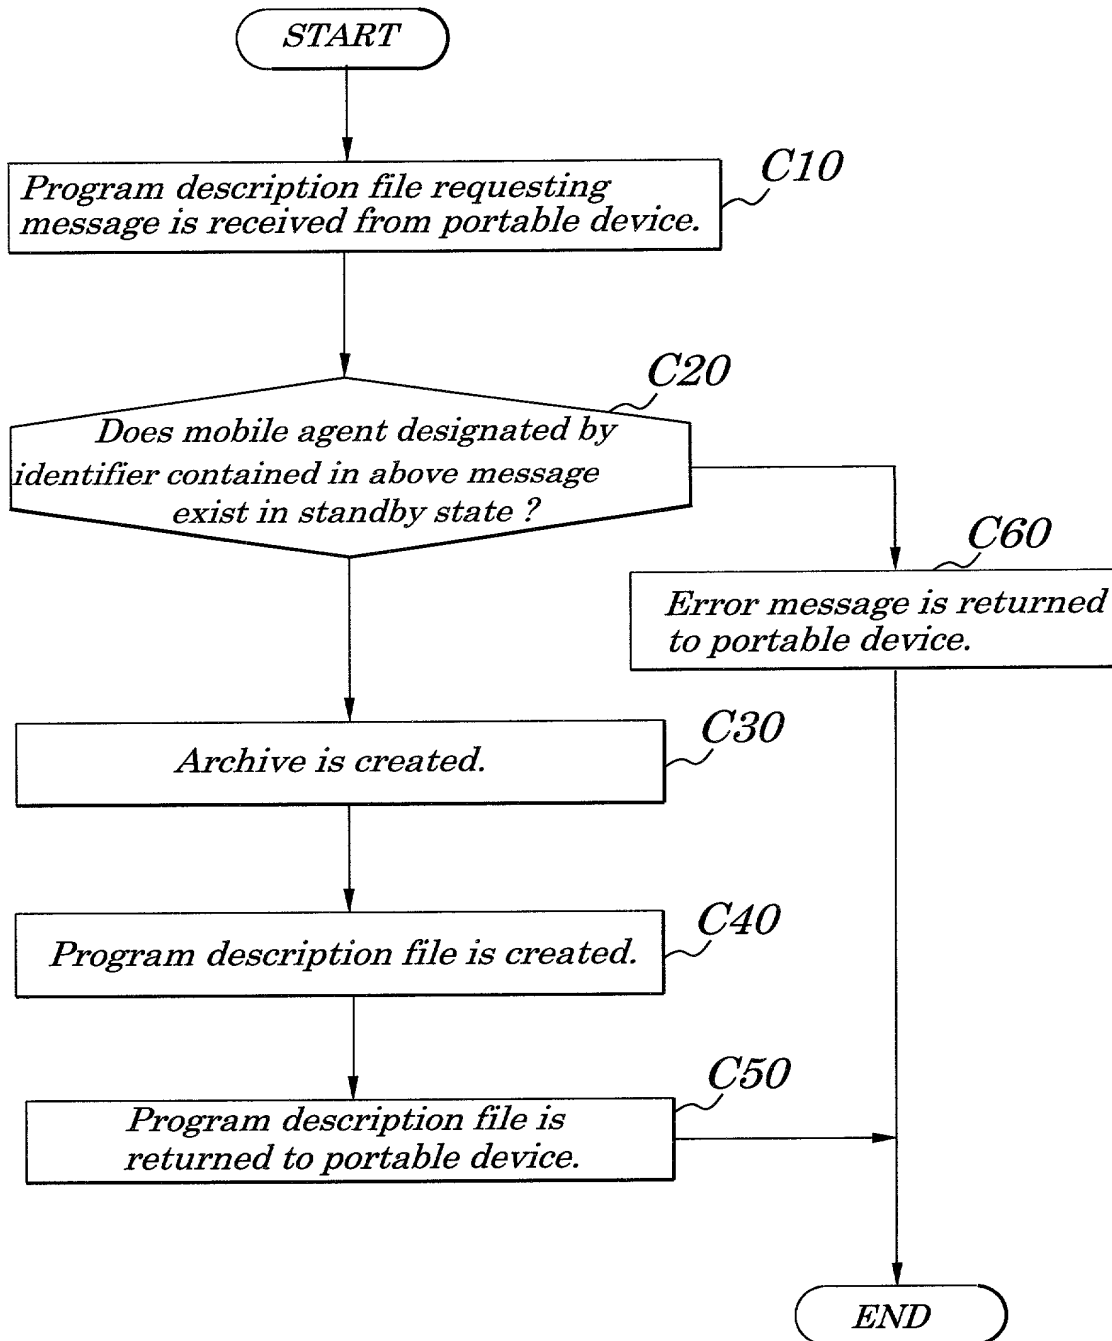


FIG.5

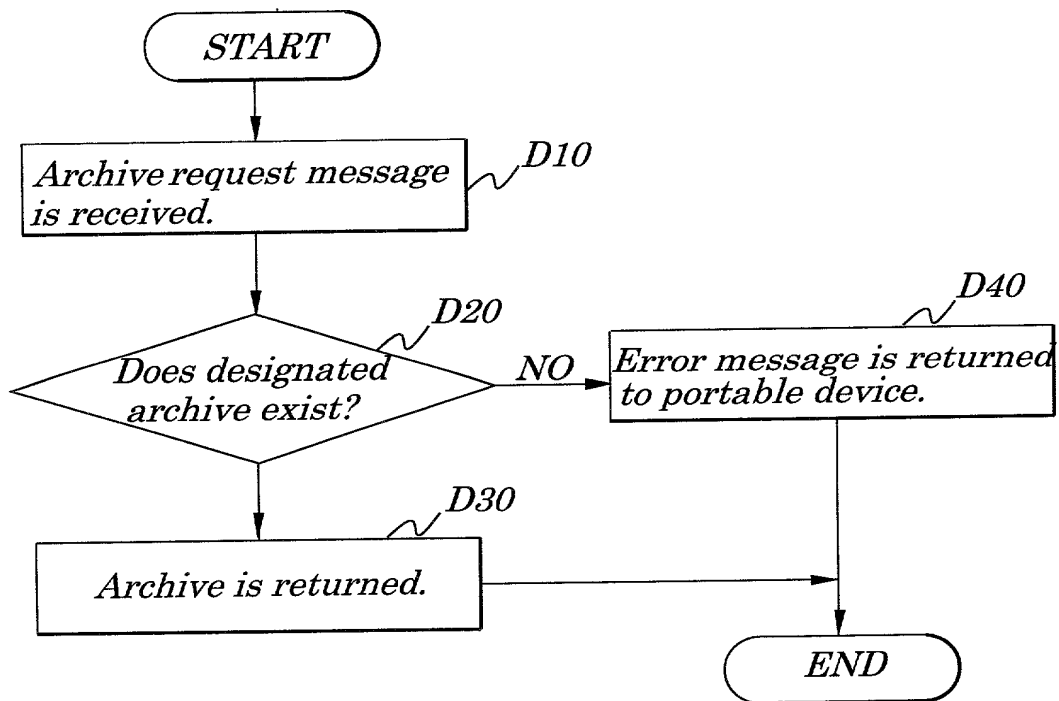


FIG.6

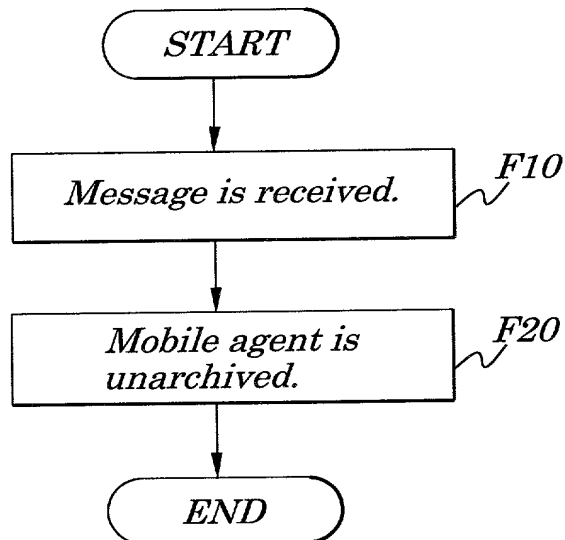


FIG. 7

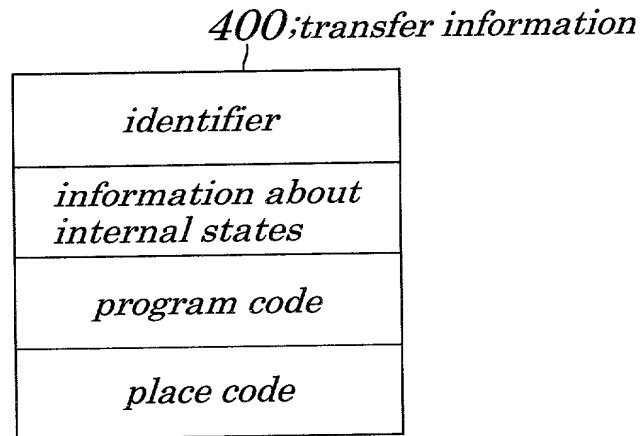


FIG. 8

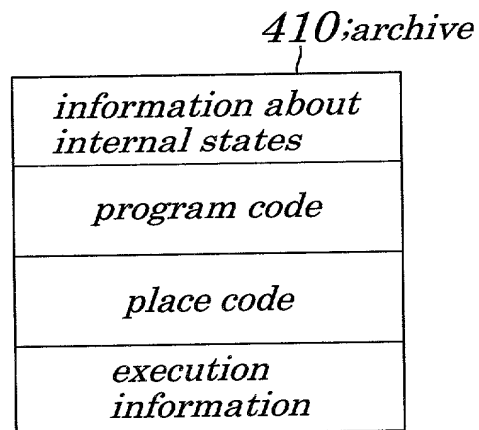


FIG. 9

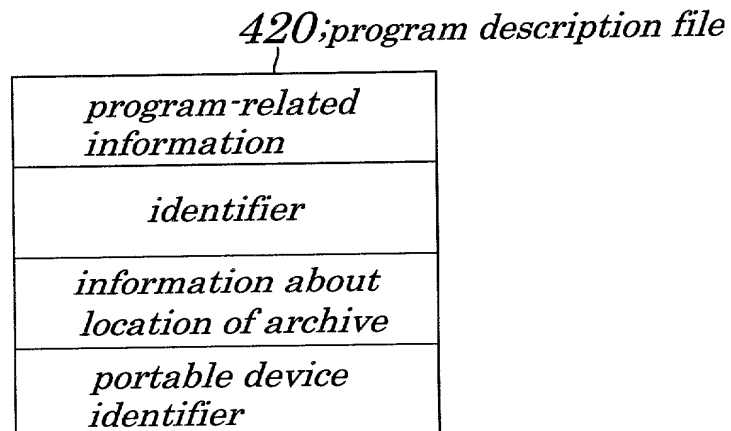


FIG.10

450;message

↓

<i>identifier</i>
<i>information about internal state</i>

FIG.11

430;first associative table

↓

<i>portable device identifier</i>	<i>identifier list</i>
⋮	⋮

FIG.12

440;second associative table

↓

<i>identifier</i>	<i>information about internal state, information about place of program code</i>
⋮	⋮

FIG.13

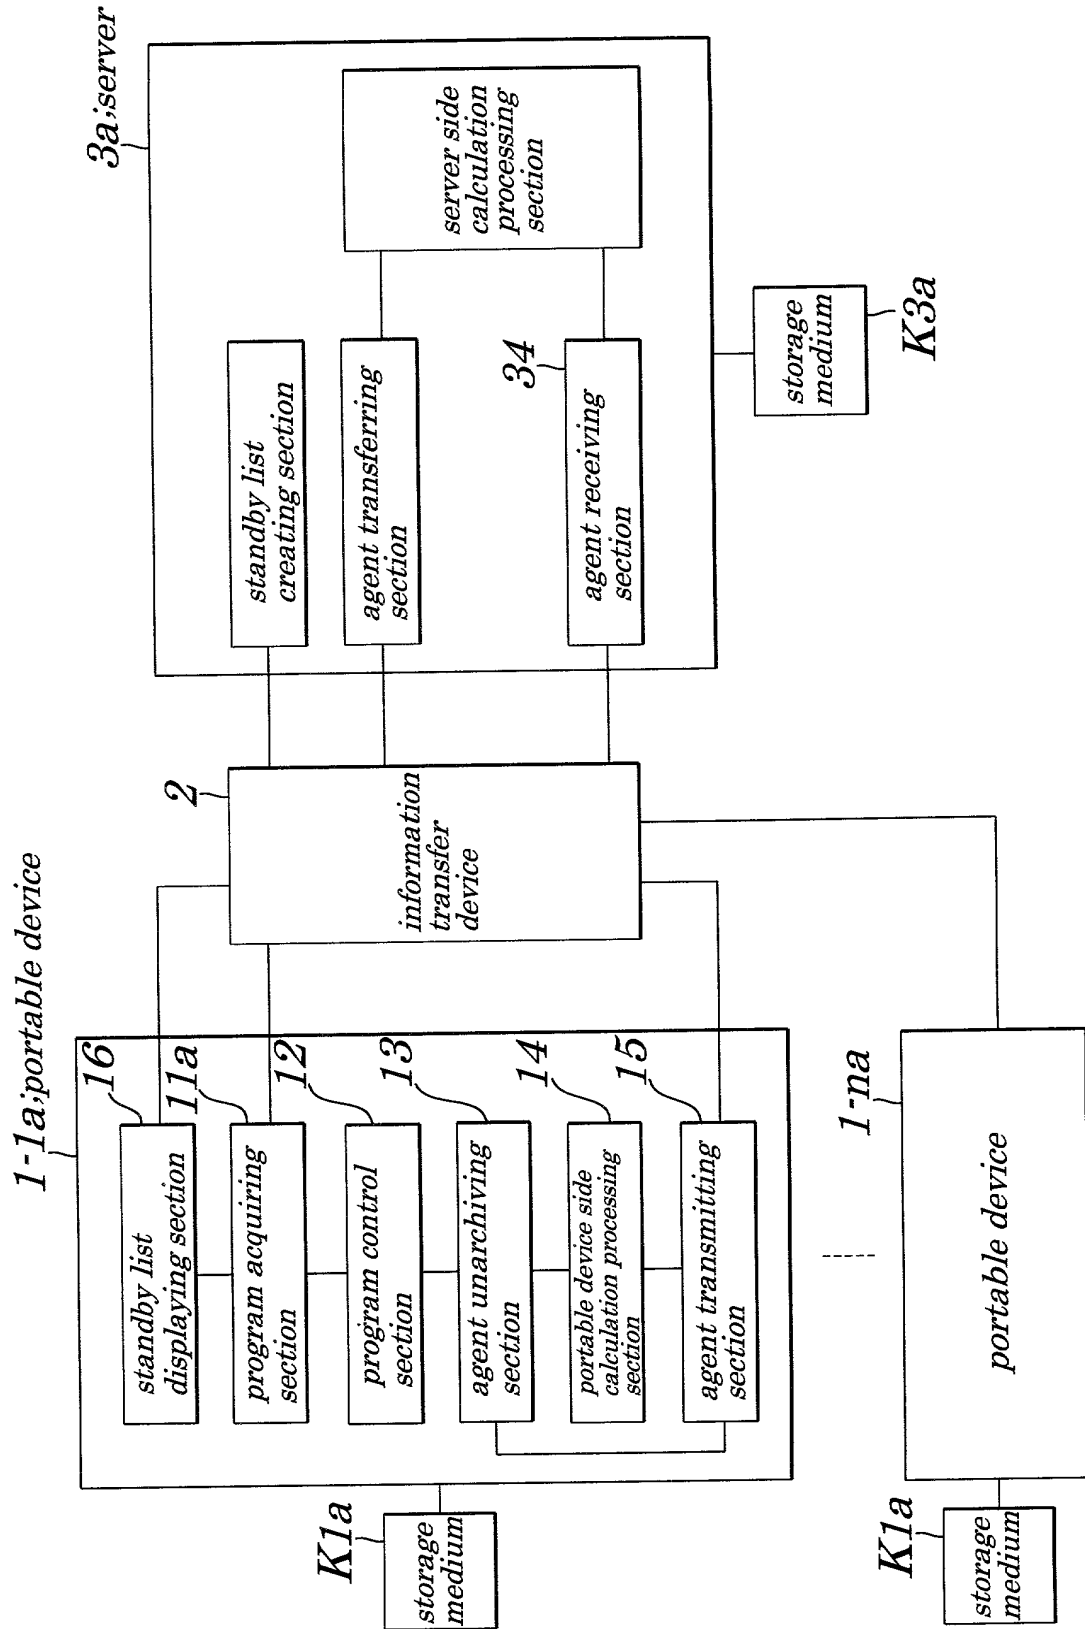


FIG. 14

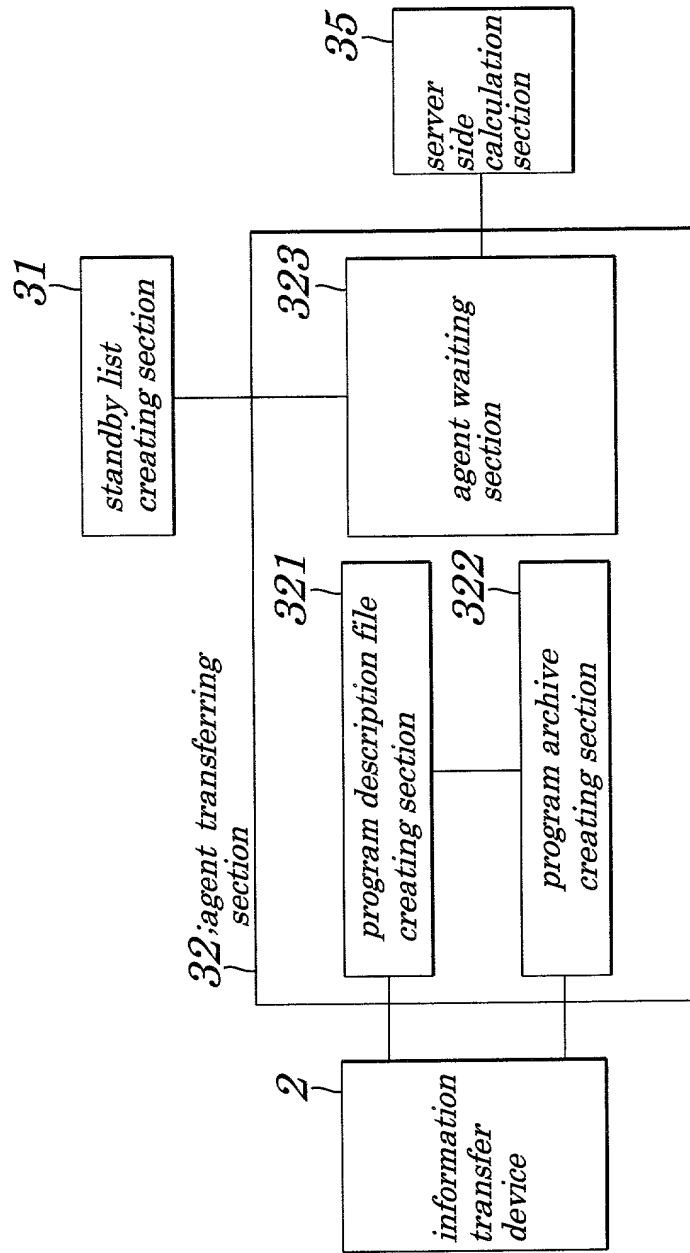


FIG.15

470; standby list

<i>identifier</i>	<i>character string that characterizes mobile agent</i>
⋮	⋮

FIG.16

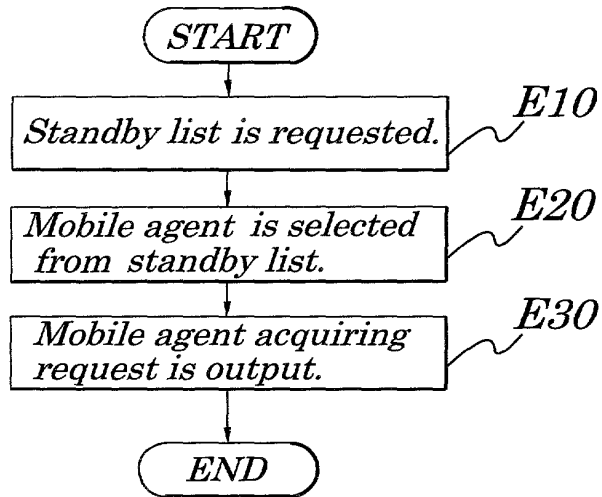


FIG.17

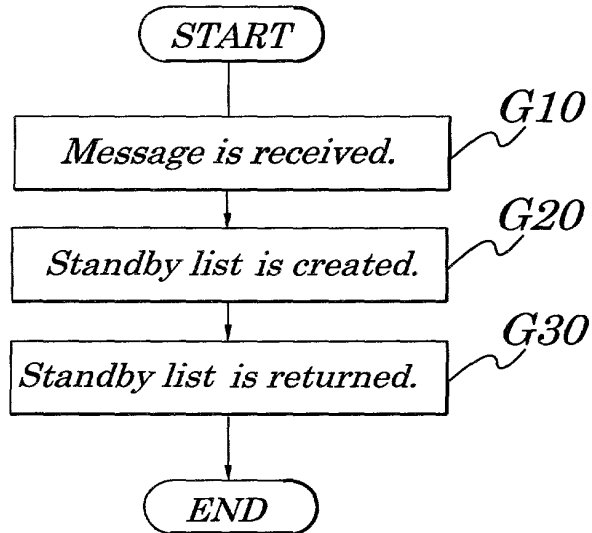


FIG. 18

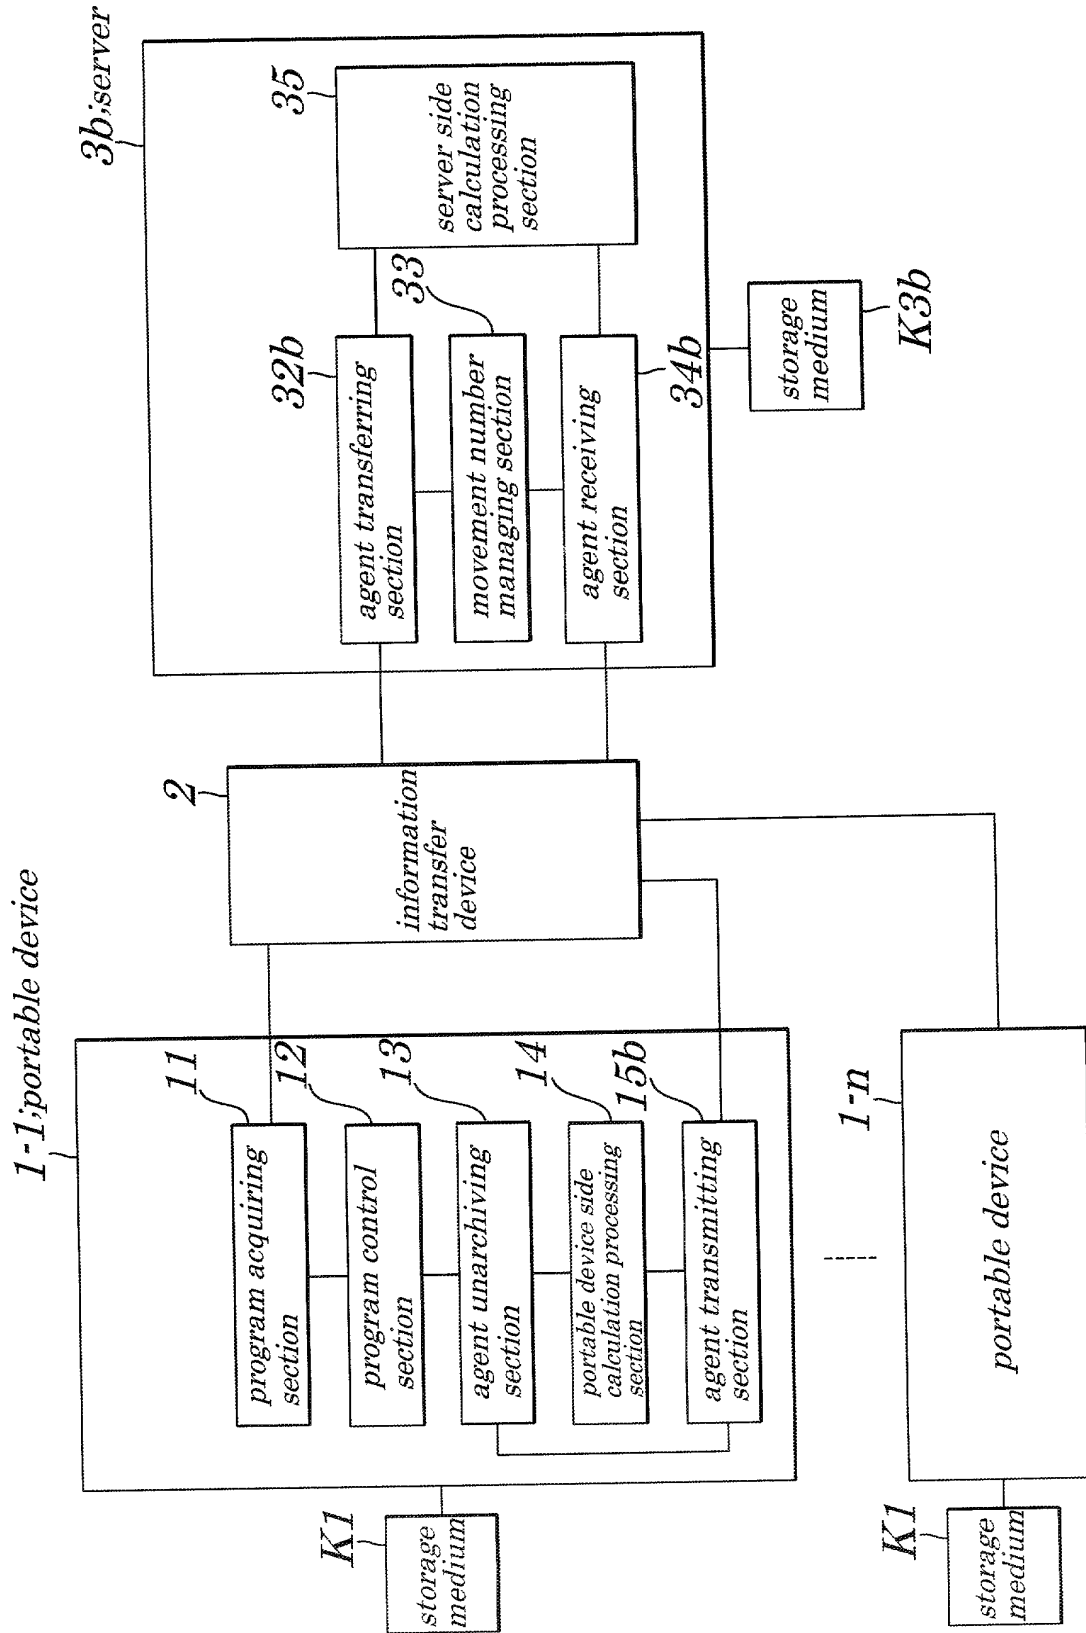


FIG. 19

460 movement number managing data

identifier	movement number
...	...

FIG. 20

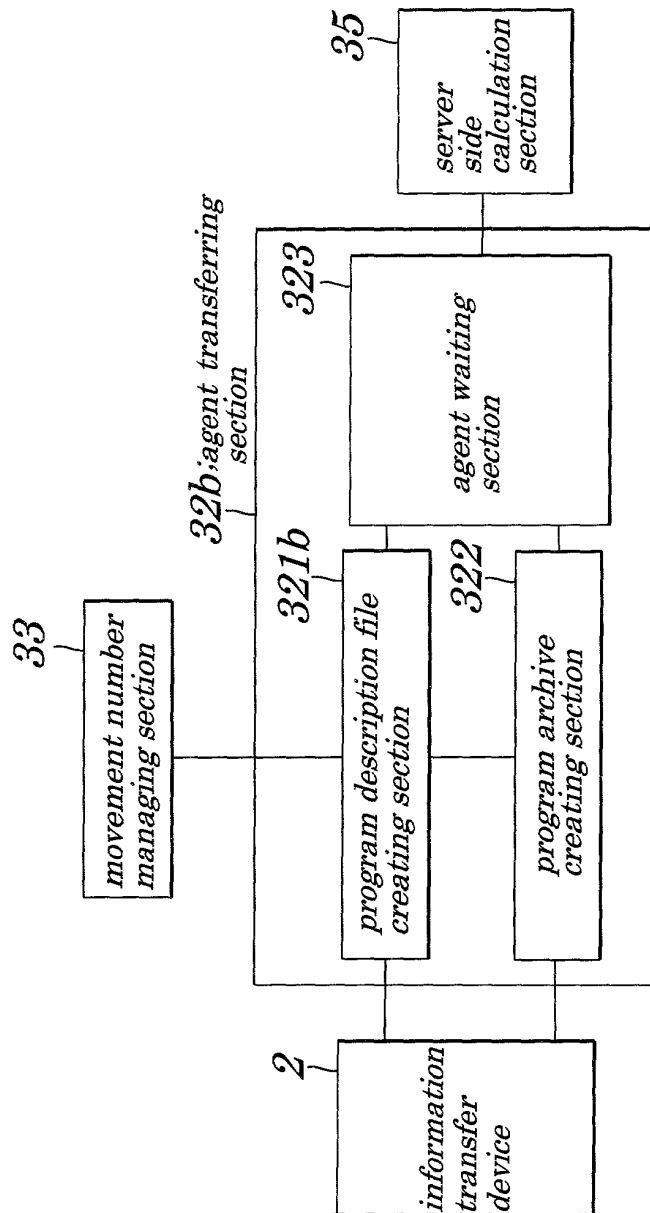


FIG.21

420b;program description file

<i>program-related information</i>
<i>identifier</i>
<i>information about location of archive</i>
<i>portable device identifier</i>
<i>movement number</i>

FIG.22

450b;message

<i>identifier</i>
<i>information about internal states</i>
<i>movement number</i>

FIG.23

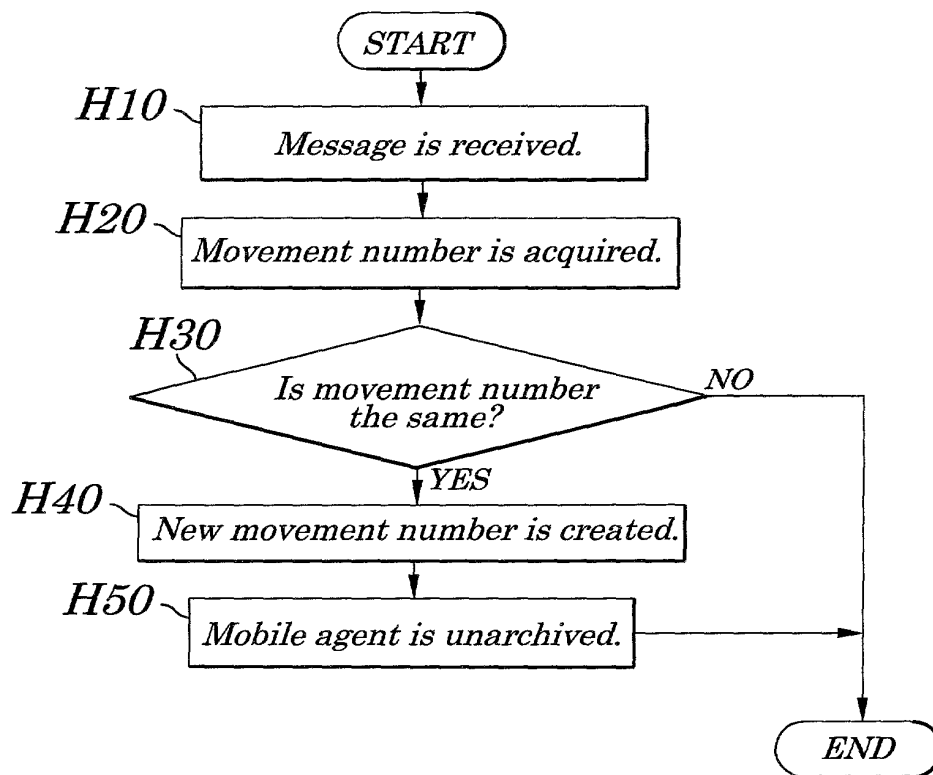


FIG.24 (PRIOR ART)

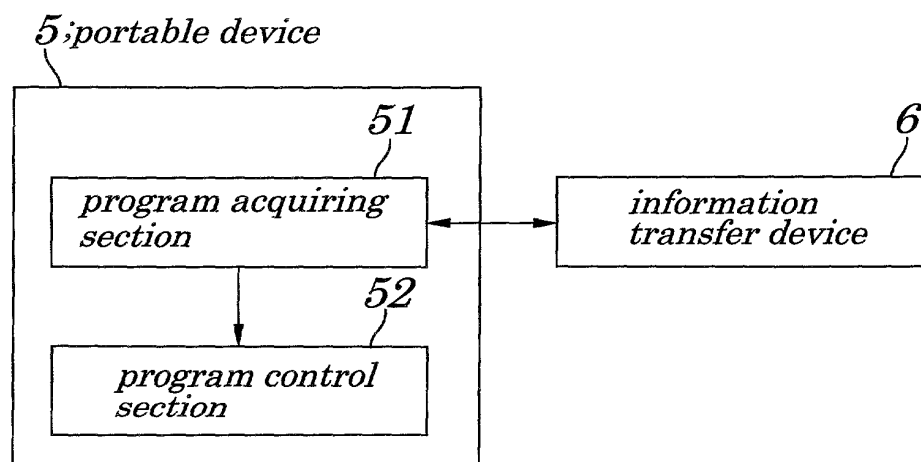


FIG.25 (PRIOR ART)

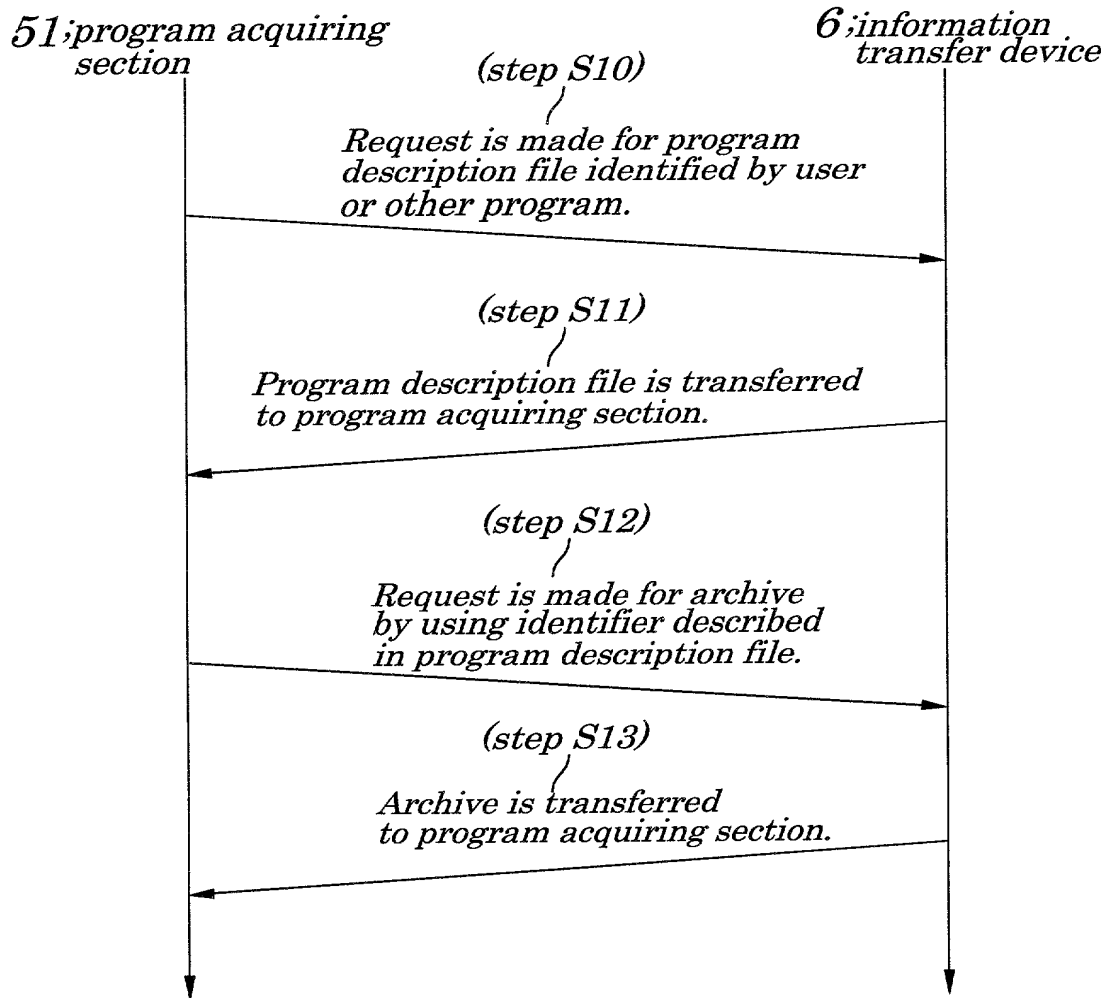


FIG.26 (PRIOR ART)

